

电子产品环境性能测试 均可享受特别优惠!!

防水防尘测试 (EN/IEC 60529)

- 防水等级: IPX1 – IPX8
- 防尘等级: IP1X – IP6X

随机振荡测试

- 频率范围: 5 Hz – 2500 Hz
- 振幅: 50mm (峰值-峰值)
- 振动平台: 1m X 1m
- 方向: X, Y, Z

温度湿度测试

- 可按照客户的需求进行设计
- 温度范围: -40°C – 150°C
- 湿度范围: 20% – 98%
- 温度自动上升和下降

如欲了解更多相关资料, 请通过以下方式与我们电器及电子产品部联系:

香港
东莞
上海
深圳
中山
德国

电话: +852 2666 1853
电话: +86 769 8111 9888
电话: +86 21 5219 8248
电话: +86 755 8366 6380
电话: +86 760 8880 2536
电话: +49 8732 6381

传真: +852 2665 0848
传真: +86 769 8111 9001
传真: +86 21 5219 8249
传真: +86 755 8366 2770
传真: +86 760 8880 2536
传真: +49 8732 2345


电邮: eet@hkstc.org
电邮: ep@dgstc.org
电邮: shstc@shstc.org
电邮: ep@dgstc.org
电邮: ep@dgstc.org
电邮: info@pkm.eu.com

网址: www.stc-group.org
网址: www.dgstc.org
网址: www.shstc.org



更多资讯, 请关注STC微信公众平台或新浪微博。



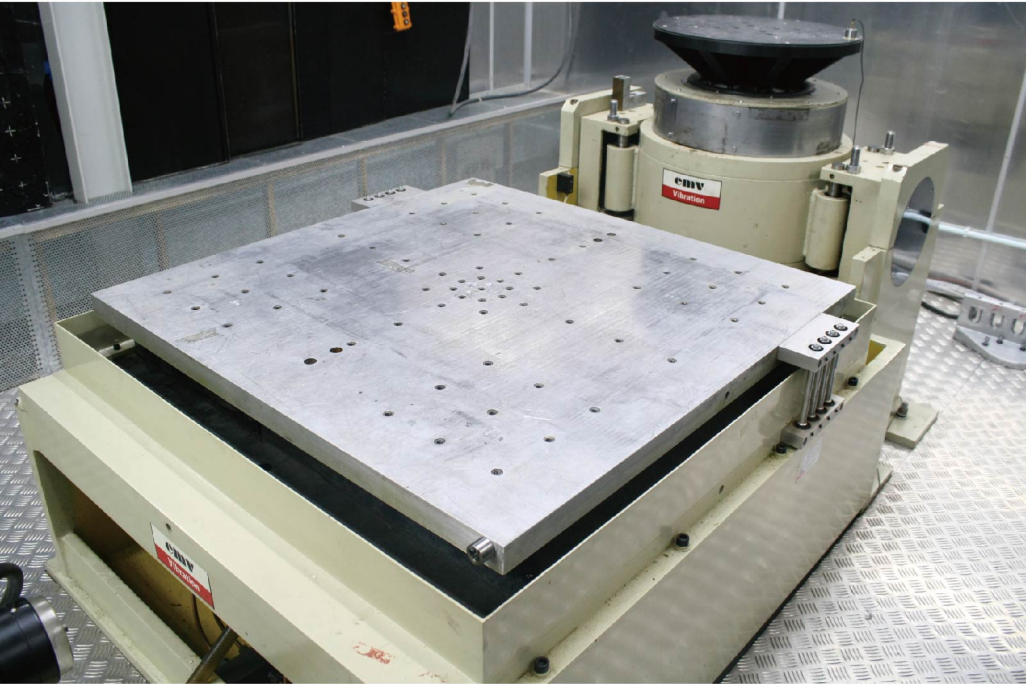

Environmental Performance Testing on Electrical Products

All you can get **Special Offer!!**

Water Resistance & Dust Resistance (EN/ IEC 60529)

- Water Resistance: IPX1 – IPX8
- Dust Resistance: IP1X – IP6X

Random Vibration Test

- Frequency Range: 5 Hz to 2500 Hz
- Amplitude: 50mm (peak-peak)
- Vibration Platform: 1m X 1m
- Direction: X, Y and Z

Temperature / Humidity Tests

- Programmable to suit customer needs
- Temperature Range: -40° C to 150° C
- Humidity Range: 20% to 98%
- Temperature Ramp up/down automatically

For more information, please contact our Electrical Products Division:

Hong Kong	Tel: +852 2666 1853	Fax: +852 2665 0848	E-mail: eet@hkstc.org
Dongguan	Tel: +86 769 8111 9888	Fax: +86 769 8111 9001	E-mail: ep@dgstc.org
Shanghai	Tel: +86 21 5219 8248	Fax: +86 21 5219 8249	E-mail: shstc@shstc.org
Shenzhen	Tel: +86 755 8366 6380	Fax: +86 755 8366 2770	E-mail: ep@dgstc.org
Zhongshan	Tel: +86 760 8880 2536	Fax: +86 760 8880 2536	E-mail: ep@dgstc.org
Germany	Tel: +49 8732 6381	Fax: +49 8732 2345	E-mail: info@pkm.eu.com

Website: www.stc-group.org
 Website: www.dgstc.org
 Website: www.shstc.org



For more information, please scan the QR code below to add STC on Wechat or Sina Weibo.